



# WETLOK™

## Permeable Jointing Sand

### All Weather Permeable Jointing Sand


#### WETLOK™

WetLok is a self-curing jointing material for all types of paving projects with joints sizes of  $\frac{3}{16}$ " to 5". WetLok is a quick and easy way to ensure a permanent joint with no need for special machinery or equipment.

#### APPLICATIONS

- ▶ Concrete/Clay Pavers
- ▶ Wetcast
- ▶ Natural Stone
- ▶ Terracotta
- ▶ Hybrid or traditional base installs
- ▶ Installations with HexaBase™ and other base replacement systems
- ▶ Patios
- ▶ Walkways
- ▶ Pool Decks

**EASY INSTALL, WHENEVER YOU WANT!**

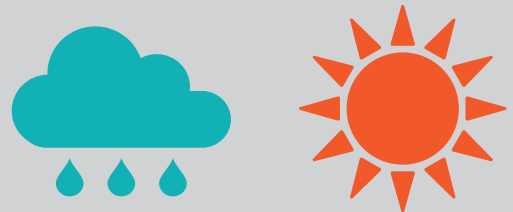

**ALL WEATHER**

# ALL WEATHER

TAN

GRANITE

BLACK

## BENEFITS

- ▶ Can be installed in the rain
- ▶ Pre-mixed and ready to use
- ▶ Use for joints 3/16" - 5" (0.48 - 12.7cm)
- ▶ Permeable and allows water to escape, unlike polymeric sand
- ▶ Use with hybrid or traditional base
- ▶ Safe from freezing weather after installed
- ▶ 12-month shelf life
- ▶ Can keep unused product for future use
- ▶ Easy to use, simply brush into joints and compact with water
- ▶ Eco friendly
- ▶ Packaging is 100% recyclable
- ▶ Resists weeds and plant growth
- ▶ Easy to clean

## COVERAGE

Coverage will vary depending on surface and application. Generally, one tub will cover 45 - 60 sq. ft. (4.18 - 5.57 sq. yd.) of pavers with a 3/16" (0.48 cm) joint.

### Specific Joint Size Coverage Estimates:

3/16" joint = 51 sq. ft. per 36 lb. bucket

3/4" joint = 13.5 sq. ft. per 36 lb. bucket

1" joint = 10.6 sq. ft. per 36 lb. bucket

*\*\*Wider joints will reduce overall coverage. WetLok can be used from a 3/16" (0.48 cm) joint width all the way up to a 5" (12.7cm) joint. Minimum joint depth is 1" (2.54 cm).\*\**

## Ordering

WetLok™		
PART #	SIZE	QUANTITY
WETLOK TAN 36	36 lb TUB	65 TUBS/PLT
WETLOK GRA 36	36 lb TUB	65 TUBS/PLT
WETLOK BLK 36	36 lb TUB	65 TUBS/PLT

## Color Coded Lids

